


**SPLINTE
SAFETY PINS**

SPLINTE - SAFETY PINS

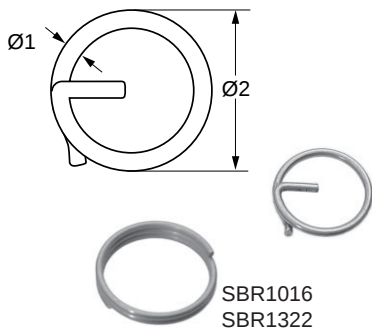


RINGSPLINTE (1VE=10 Stück) - RING PINS (in packs by 10ea.)
Edelstahl 1.4401 - stainless steel AISI 316

Art.-No.	Ø1 mm	Ø2 mm
SBR 1011	1,0	11
SBR 1215	1,25	15
SBR 1519	1,5	19
SBR 1825	1,8	25
SBR 2023	2,0	23
SBR 1016	2x1,0	16
SBR 1322	2x1,25	22

2,5 Drehungen - 2,5 turns
2,5 Drehungen - 2,5 turns


Alle Ringsplinte sind auch in 100-Stück-Packungen lieferbar: Art.-Nr. plus Kennzeichen "X"
All ring pins are also available in 100-packs: Cat. No. plus "X"

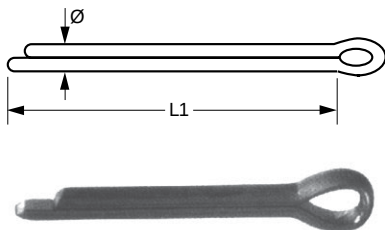

STECKSPLINTE (1VE=10 Stück) - COTTER PINS (in packs by 10ea.)
Edelstahl 1.4401 - stainless steel AISI 316

Art.-No.	Ø mm	L1 mm
SBS 1610	1,6	10
SBS 1616	1,6	16
SBS 2012	2,0	12
SBS 2016	2,0	16
SBS 2020	2,0	20
SBS 2025	2,0	25
SBS 2525	2,5	25
SBS 2532	2,5	32
SBS 3225	3,2	25
SBS 3232	3,2	32
SBS 3240	3,2	40
SBS 4040	4,0	40
SBS 4050	4,0	50

Alle Stecksplinte sind auch in 100-Stück-Packungen lieferbar: Art.-Nr. plus Kennzeichen "x"
All cotter pins are also available in 100-packs: Cat. No. plus "x"



FEDERSTECKER - "BETA"-PINS
Edelstahl 1.4301 - stainless steel AISI 304

Art.-No.	Ø1 mm	L1 mm	L2 mm	Ø2 mm	Packmenge package
MCF 020-10	2,0	48	12	8-12	VP á 10 Stück
MCF 025-10	2,5	53	14	8-14	VP á 10 Stück
MCF 030-10	3,0	60	16	10-15	VP á 10 Stück
MCF 040-10	4,0	78	20	15-20	VP á 10 Stück
MCF 050	5,0	103	24	20-25	
MCF 060	6,0	103	28	25-30	



SURE-CLIP®
Wantenspanner-Splintsicherungen - rigging screw safety pins

Art.-No.	Type type	Packmenge package
MS C1	f. Hasselfors-Spanner 5/16"	VP á 5 Stück
MS C2	f. Hasselfors-Spanner 3/8"	VP á 5 Stück
MS C3	f. Hasselfors-Spanner 7/16"	VP á 5 Stück
MS C4	f. Hasselfors-Spanner 1/2"	VP á 5 Stück
MS C5	f. Hasselfors-Spanner 5/8"	VP á 5 Stück
MS C6	f. Hasselfors-Spanner 3/4"	VP á 5 Stück



Kugelsperrbolzen - Quick Pins
Edelstahl 1.4401 - stainless steel AISI 316

Art.-No.	Ø mm	L1 mm	L2 mm
HA 5005	5,0	26,5	12,5
EK 26410	6,35	25	12
EK 26415	6,35	38	25
EK 26420	6,35	51	38
EK 26425	6,35	64	51
EK 26428	6,35	67	54
EK 26430	6,35	76	64
EK 26434	6,35	79	67
EK 11630	6,0	22	

mit 15cm Sicherungsseil